

1

1 2

1 2
3 4

1 2
3 4

1 3 2
4




SW-41MVT

4K60Hz, 4in-1Out HDMI
Switcher with Multiview




Lightning Protection
Surge Protection
ESD Protection




4 HDMI Sources



5 Display Mode




HDCP 2.2
Secure Link



Audio Input Channel
Button Control




Supports Full
Version of 4K



Supports Latest
Audio Formats




16 EDID
SETTINGS



Metal Casing

Connection Diagram

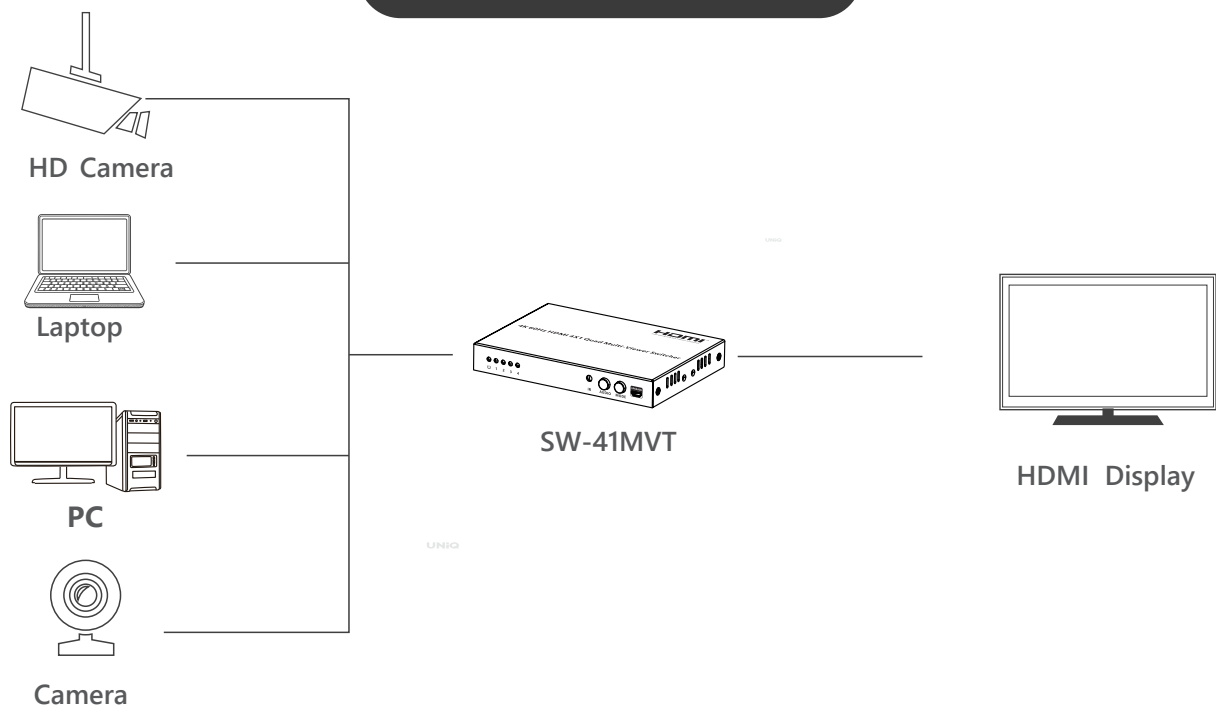

4 HDMI Inputs, 1 Output for Streamlined Setup

- ▶ Allows connection of up to four HDMI devices—PCs, consoles, cameras, or media players
- ▶ Outputs all sources to a single screen, simplifying multi-device setups
- ▶ Helps organize and manage various content inputs in professional or home environments



Sharp 4K@60Hz Output for Ultra-Clear Viewing

- ▶ Delivers high-definition 4K visuals at a smooth 60Hz refresh rate
- ▶ Offers vivid colors and precise detail for an immersive experience
- ▶ Ideal for gaming, content review, live feeds, and control room displays

Dual Switching Made Easy


- ▶ Easily switch between HDMI sources using the front panel button or the IR remote
- ▶ Toggle instantly between 4 input devices with smooth transitions
- ▶ Enjoy hassle-free control with a simple and intuitive interface



Product Specifications SW-41MVT


Item	Specification
Input interface	4 x HDMI
Output interface	1 x HDMI
HDMI length	≤5m
Compatibility	HDMI2.0 HDCP1.4/HDCP2.2
Audio support	Dolby Digital 5.1CH/DTS 5.1CH/LPCM 2.0
Support mode	Support full screen mode, dual mode and quad mode
Support Resolutions	Input: 4096x2160@24/25/30/50/60Hz, 3840x2160@24/25/30/50/60Hz, 1080P@24/25/30/50/60Hz, 720P@50/60Hz 3440x1440@60Hz, 2560x1440@60Hz, 2560x1080@60Hz, 2560x1600@60Hz, 1920x1200@60Hz, 1680x1050@60Hz, 1600x1200@60Hz, 1600x900@60Hz, 1440x900@60Hz, 1400x1050@60Hz, 1360x768@60Hz, 1280x1024@60Hz, 1280x960@60Hz, 1280x800@60Hz, 1280x768@60Hz, 1024x768@60Hz, 800x600@60Hz, 576P@50Hz, 480P@60Hz, 640x480@60Hz Output: 3840x2160@60Hz, 1080P@60Hz
Control mode	IR/Button
Power Supply	DC12V/2A
Power Consumption	<14W
Working Temperature	-20°C~60°C
Storage Temperature	-30°C~70°C
Humidity	0~90%RH(no condensation)
Housing	Iron
Weight	498g
Color	Black
Dimensions	178.50×104.74×21.20mm
Protection	ESD protection 1a Contact discharge level 2 (±4KV) 1b Air discharge level 3 (±8KV) Implementation of the standard: IEC61000-4-2 Lightning protection, Surge protection
Package Contents	1) Multiviewer Switch x1 5) Screw x6 2) Power Adaptor DC12V/2A x1 6) Grounding Screw x2 3) Remote Controller x1 7) User Manual x1 4) Mounting Ears x2

Front

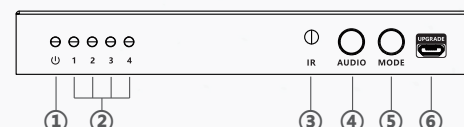

- | | |
|----|------------------------------|
| 01 | Power indicator |
| 02 | HDMI signal output indicator |
| 03 | IR signal input |
| 04 | Audio button |
| 05 | Mode button |
| 06 | Firmware Upgrade |

Back

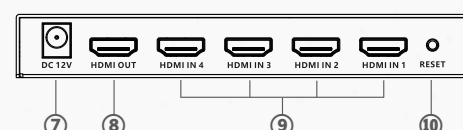

- | | |
|----|--------------------|
| 07 | DC input (12V/2A) |
| 08 | HDMI signal output |
| 09 | HDMI signal input |
| 10 | Reset |

Applications



Auditorium



NOC / SOC / CCC



Conference-Room



Town Hall



Training Hall

Prestigious Lineup of Cutting-Edge Professional AV Products

Ai Interactive Displays

AiO | Pro | Education Series
65" | 75" | 86" | 98" | 100"



Active LED Video Wall

Indoor & Outdoor LED Walls
CoB, GOB, and
Custom Pixel Pitch Options



Video Conferencing Products & Professional Cameras

From AI Video Bars to PTZ Cameras
AiO Video Bars | AiO PTZ Video Bars
PTZ Cameras | Speakers Phone
Conferencing | Microphones | DSP



AV Interface Products

Extenders – CAT6 Wireless | Point-Point
KVM Extenders | Over-IP
Matrix & Splitter Cum Extenders
Splitters Switchers | Matrix



Disclaimer

- Specifications, features, visuals, and models are subject to change without notice.
- Product availability and features may vary by region.
- Colours/images shown are for reference only; actual product may differ.
- Warranty terms vary by model and region—refer to official documentation.
- We recommend staying updated via our official channels for the latest info.
- Performance may improve with software/firmware updates.
- All trademarks belong to their respective owners.
- We are not liable for typographical or illustrative errors.
- Please dispose of products responsibly as per local e-waste norms.
- Data (if applicable) is handled per our privacy and regulatory compliance.
- No liability is assumed for indirect or consequential damages